

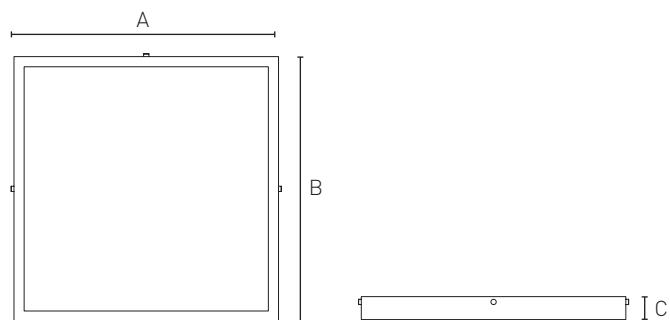


QUADRA BACKLIT UGR SURFACED

LED interior lighting

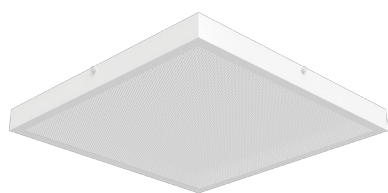

TECHNICAL PARAMETERS

Voltage	AC 90–265 V	Diffuser	microprisma
Frequency range	50 ~ 60 Hz	LED chips	SMD
Working temperature	-40 °C to +35 °C	Protection class	I.
Colour rendering index	80 Ra	Material	Aluminium
IP rating	IP 41	Weight	3 kg
Lifetime	50 000 h	Mounting	surface
Beam angle	115°	Energy class	D / F

PRODUCT VARIANTS

ORDER NUMBER	WATTAGE	COLOR TEMPERATURE	LUMINOUS FLUX	DRIVER	EMERGENCY DURATION	LUMINAIRE EFFICACY	COLOR	A (mm)	B (mm)	C (mm)
21170	35 W	4000 K	4020 lm	On/Off	-	115 lm/W	White	600	600	52
20751	40 W	4000 K	3308 lm	On/Off	-	83 lm/W	White	600	600	52
21478	51 W	4000 K	3913 lm	On/Off	-	77 lm/W	White	600	600	52
21479	55 W	4000 K	4129 lm	On/Off	-	75 lm/W	White	600	600	52
21444	35 W	4000 K	2992 lm	On/Off	-	85 lm/W	Black	600	600	52
20750	40 W	4000 K	3308 lm	On/Off	-	83 lm/W	Black	600	600	52
21445	51 W	4000 K	3913 lm	On/Off	-	76 lm/W	Black	600	600	52
21446	55 W	4000 K	4129 lm	On/Off	-	75 lm/W	Black	600	600	52