



HTL-S1 / S2 / S3

LED special lighting

TRACKLINE

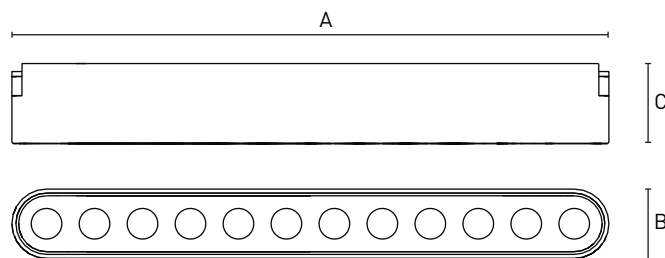

TECHNICAL PARAMETERS

| | | | |
|------------------------|----------------|------------|----------------|
| Voltage | DC 24 V | Beam angle | 30° |
| Working temperature | 0 °C až +30 °C | LED chips | SMD |
| Colour rendering index | 90 Ra | Material | Aluminium / PC |
| IP rating | IP 20 | Color | Black |
| Lifetime | 50 000 h | Mounting | Surface / Wall |

PRODUCT VARIANTS

| ORDER NUMBER | WATTAGE | LUMINOUS FLUX | COLOR TEMPERATURE | LUMINAIRE EFFICACY | WEIGHT | A (mm) | B (mm) | C (mm) |
|--------------|---------|---------------|--------------------------|--------------------|---------|--------|--------|--------|
| 21584 | 6 W | 314 lm | 3000 K / 4000 K / 6000 K | 52 lm/W | 0,08 kg | 115 | 25 | 29 |
| 21585 | 12 W | 518 lm | 3000 K / 4000 K / 6000 K | 43 lm/W | 0,12 kg | 222 | 25 | 29 |
| 21586 | 18 W | 748 lm | 3000 K / 4000 K / 6000 K | 42 lm/W | 0,18 kg | 330 | 25 | 29 |