



LONG BACKLIT SURFACED

LED interior lighting

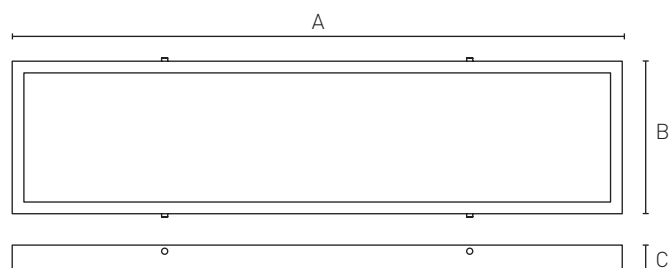

TECHNICAL PARAMETERS

Voltage	AC 90–265 V	Diffuser	PA
Frequency range	50 ~ 60 Hz	LED chips	SMD
Working temperature	-40 °C to +35 °C	Protection class	II.
Colour rendering index	80 Ra	Material	Aluminium
IP rating	IP 41	Color	white
Lifetime	50 000 h	Mounting	surface
Beam angle	115°	Energy class	F
Weight	3,4 kg		

PRODUCT VARIANTS

ORDER NUMBER	WATTAGE	COLOR TEMPERATURE	LUMINOUS FLUX	DRIVER	EMERGENCY DURATION	LUMINAIRE EFFICACY	A (mm)	B (mm)	C (mm)
20334	40 W	4000 K	3868 lm	standard		97 lm/W	1200	300	52
20335	40 W	4000 K	3868 lm	DALI		97 lm/W	1200	300	52
20336	40 W	4000 K	3868 lm	standard	1H	97 lm/W	1200	300	52
20337	40 W	4000 K	3868 lm	standard	3H	97 lm/W	1200	300	52
20338	40 W	4000 K	3868 lm	DALI	1H	97 lm/W	1200	300	52
20339	40 W	4000 K	3868 lm	DALI	3H	97 lm/W	1200	300	52